

# XT-5415IR

Specification	XT-5415IR
Processor	Intel Haswell G1820, 2.70 GHz, 2M Cache; Intel Haswell G3320TE, 2.30 GHz, 3M Cache; Intel Haswell Core i3-4330TE, 2.40 GHz, 4M Cache; Intel Haswell Core i5-4570TE, up to 3.30 GHz, 4M Cache; Intel Haswell Core i7-4770TE, up to 3.30 GHz, 8M Cache
System Memory	DDR3L, SO-DIMM x 2, max. 16GB
Storage Device	SATA x 2
RAID Function	N/A
Intel vPro Support	N/A
TPM Support	N/A
Power Supply	12V/130W
OS Support	Windows 7/POSReady 7/Windows Embedded 8.1 Industry/Windows 10 IoT/Linux per request
Display & Touch	
LCD	15" TFT LCD
Resolution	1024 x 768
Touch	IR touch
I/O & Expansion	
Serial Port	6, DB9 x 2 + RJ50 x 2, pin header x 2 from service window, 5V support on all COM ports, 12V support on COM 1 to COM 4
Parallel Port	1, via optional conversion cable through service window
Standard USB Port	6, USB 3.0 x 2 + USB 2.0 x 4
PoweredUSB Port	Optional 24V x 1 + 12V x 3 via GEN8E base
LAN Port	10/100/1000 Mb x 2
Display Port	VGA x 1, 12V support for Posiflex monitors
CR Port	1, control 2 CR via optional Y-cable
PS/2 Port	1, via optional conversion cable through service window
UPS Port	Yes
Audio	Internal 2W speaker x 1 +Line-Out/MIC-In Combo Jack
Expansion Slot	Mini-PCle slot x 1
Physical Dimension	
Dimension (W x D x H in mm)	372 x 320 x 252.7
Weight (N. W. in kg)	5.86
Environmental	
Operating Condition	0°C - 40°C, 20%RH - 90%RH (Equipped with HDD); 0°C - 50°C, 20%RH - 90%RH (Equipped with SSD)
Storage Condition	-20°C - 70°C, 10%RH - 90%RH
Built-in Options	
WiFi	Mini-PCle WiFi/BT module
Attachment Options	
POS Monitor	Non-touch TFT LCD: 7"/9.7"/12.1"/14"/15"; PCAP touch TFT LCD: 9.7"/14"/15"; Resistive touch TFT LCD: 15"
Line Display	2 x 20 rear-mount VFD/LCD customer line display; 7" color LCD graphical customer line display
Attachment	MSR; iButton; Rotatable 2D Scanner; RFID; Fingerprint Sensor; Keypad

\* Designed and Manufactured in Taiwan by Posiflex Technology, Inc.  
\* The product information and specifications are subject to change without prior notice.  
\* Please refer to the website for more attachment options.

Certifications



EN202102V1



POSIFLEX TECHNOLOGY, INC.

No. 23, Datong St., Tucheng Dist., New Taipei City 23679, Taiwan  
Tel : +886-2-2268-5577    E-mail : sales@posiflex.com.tw  
Fax : +886-2-2268-5388    www.posiflex.com

Authorized Distributor / Reseller

POSIFLEX



Flexible! Powerful! Elegant!

# XT-5415IR

High-End IR Touch Fanless POS Terminal

# XT-5415IR

**POSIFLEX**



In today's retail and hospitality markets, POS terminal is no longer just a cold and hard business tool. It is a part of the store decoration, a part of the store image. Each curve and detail of the POS terminal should add something to the overall mood of the store, to lift the shopping experience of customers.

**The XT-5415IR** features a 15" IR touch screen, beautifully sculptured slim body, and sexily curved base stand, it looks right at home at any elegantly decorated store. And more than just good looks, the XT-5415IR also offers ample of performance and flexibility to satisfy the most demanding daily POS operations.

## Sleek Look

The XT-5415IR comes from new Posiflex design language. Slimmer than ever, it is a sharp departure from the traditionally conservative Posiflex terminal design. Every curve and detail of the XT-5415IR is carefully thought out to make itself one of the most visually desirable terminals in the market.

## Scalable Performance

A wide range of CPU options from Intel Celeron to Core i3 to fit each unique need.

## Multi-Position Folding Base (U.S. Patent 9004436)

The XT-5415IR provides the selection of two foldable bases, the curvy slim GEN7E base and the larger but practical GEN8E base. The foldable base can be configured into "Flat Folded Mode" to save the shipping package volume, "Low Profile Mode" to allow greater interaction between the cashier and the customer, and the traditional "Full Extended Mode". All this can be achieved with a simple pull of the hidden lever.




Full Extended Mode



Low Profile Mode



Flat Folded Mode

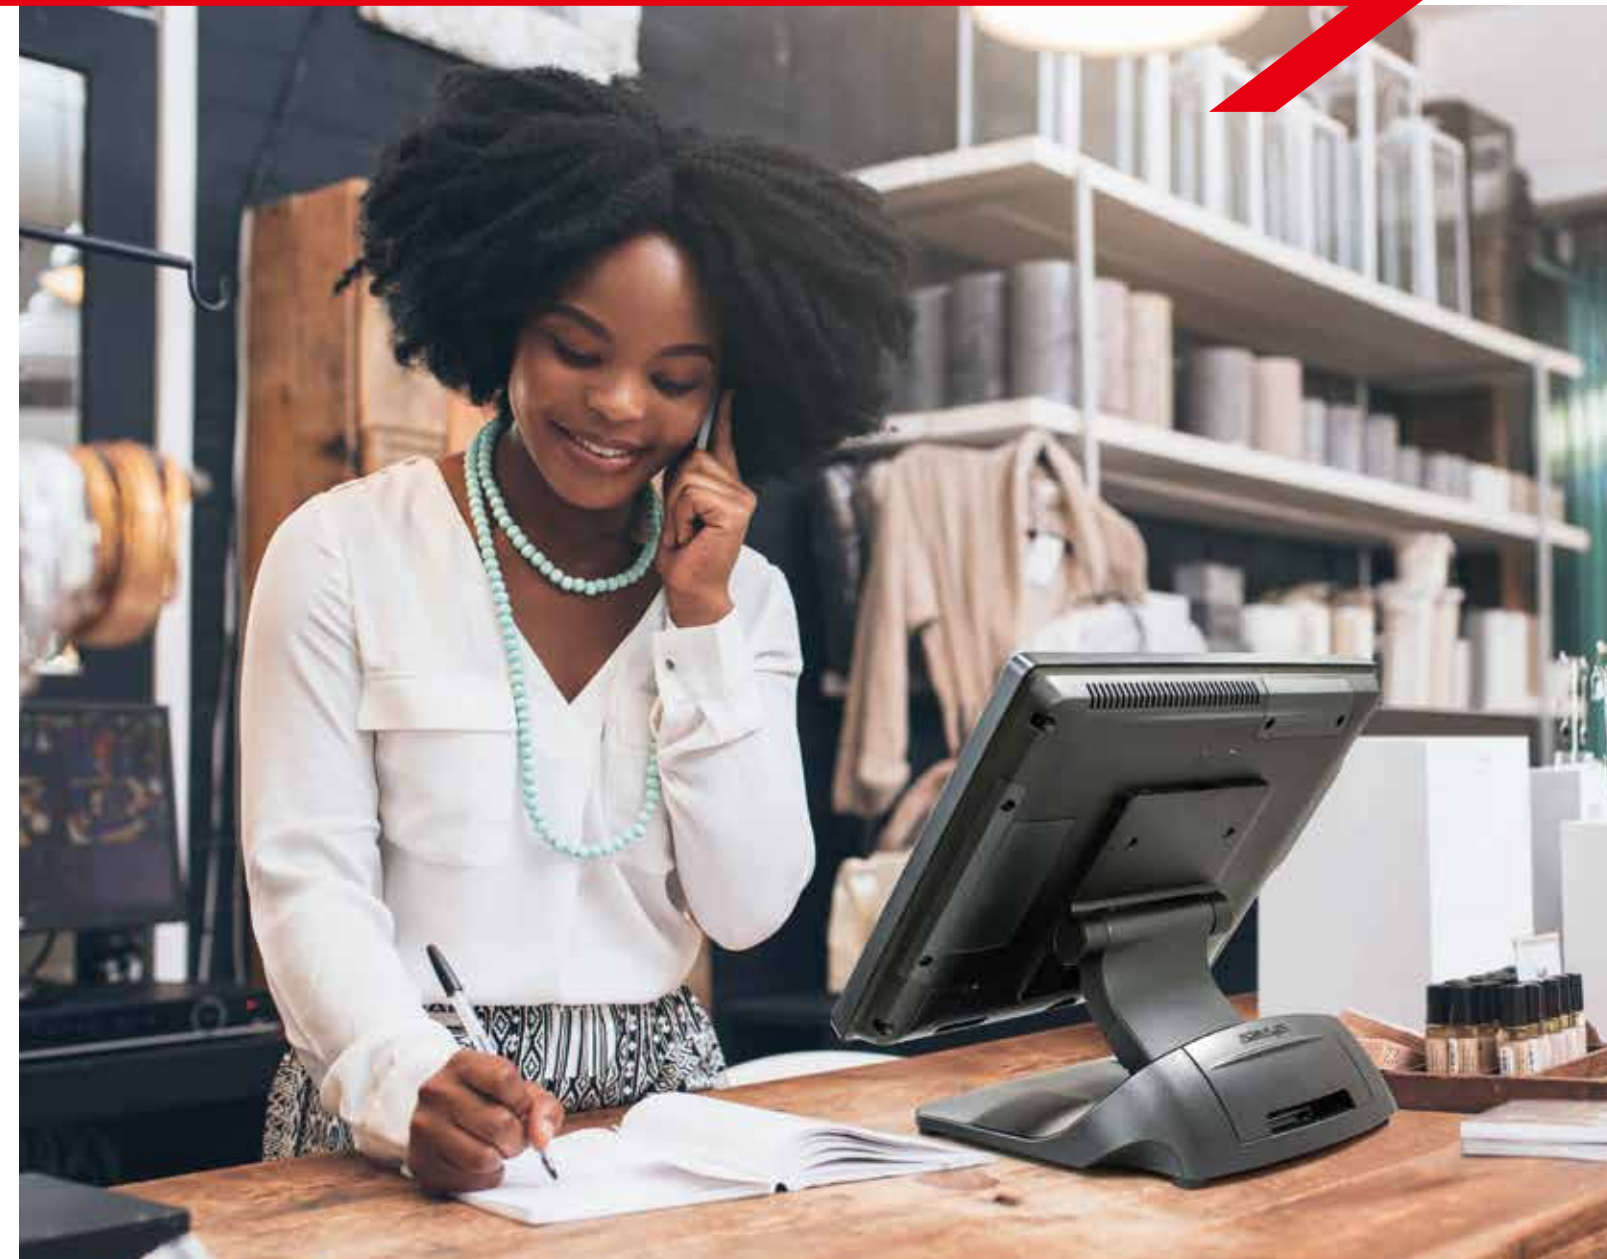

Power Adaptor

UPS Battery

PoweredUSB Ports

## Patented Fanless Technology

Solve the fan maintenance issue and provide silent mode operation, which is ideally suited for high-end boutique stores or hospital environments.

## GEN8E Base (U.S. Patent 9004436)

Optional GEN8E base integrates internal power adaptor and PoweredUSB port into the base stand, which keeps counters clutter-free.